



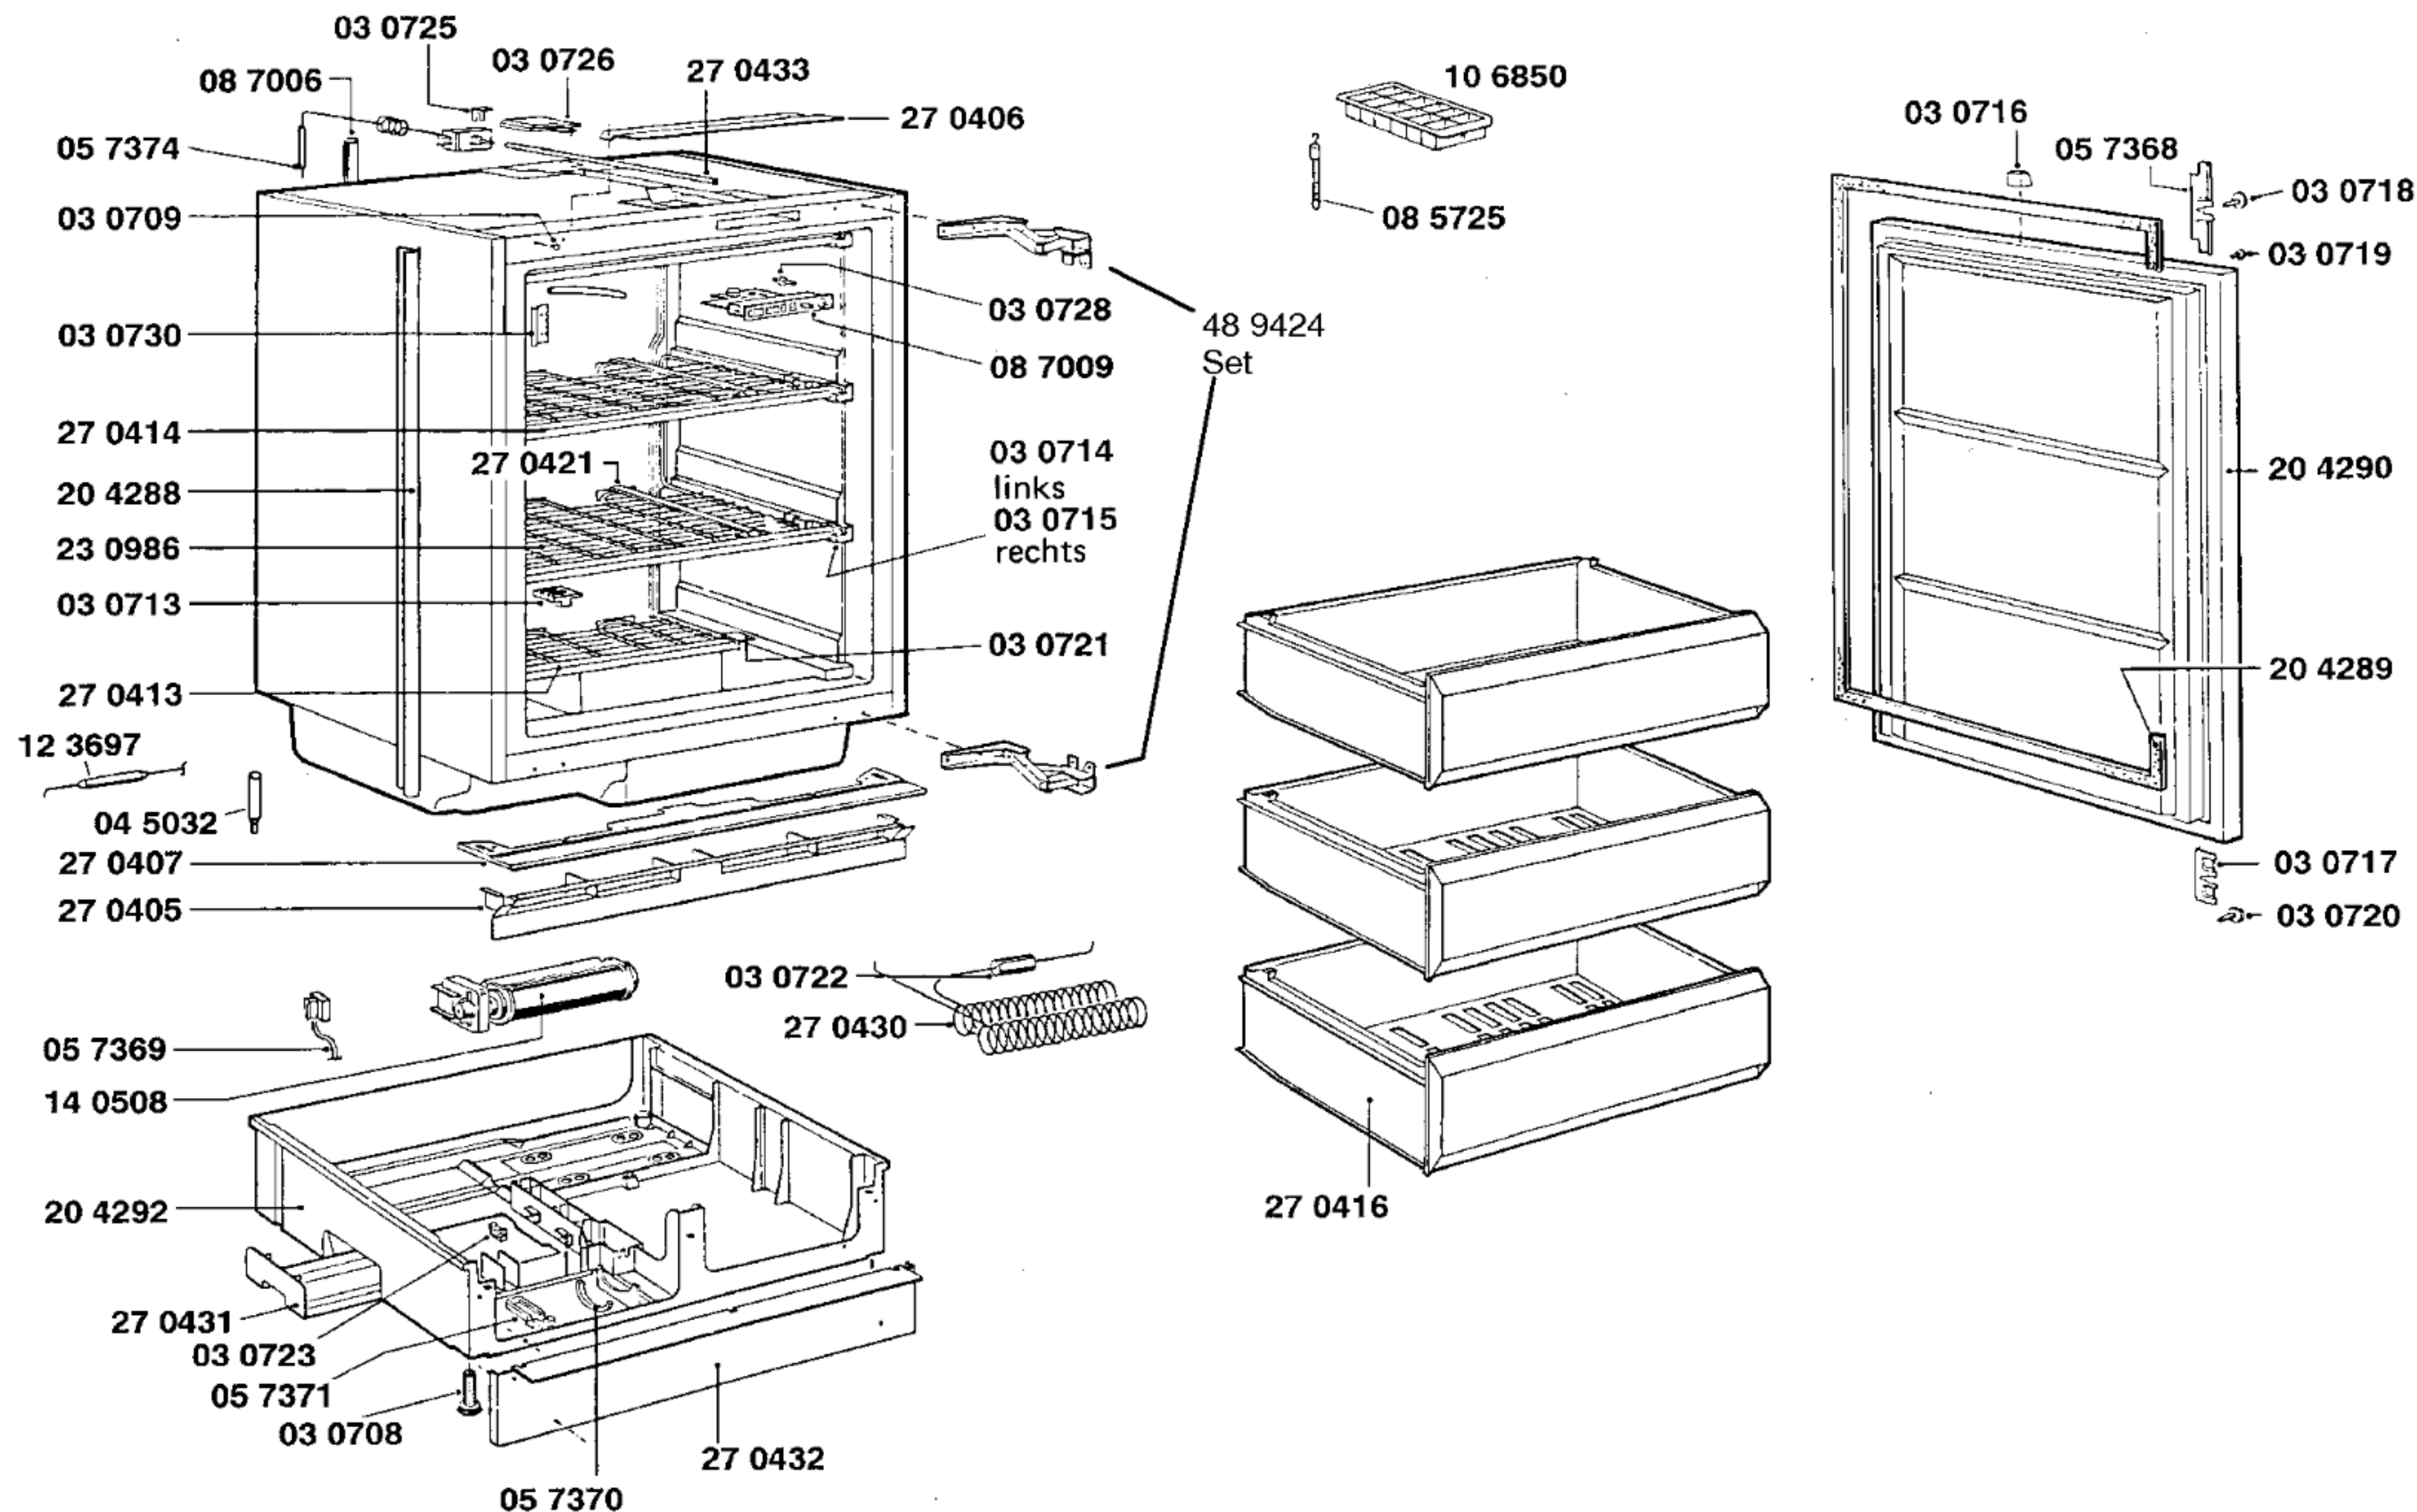

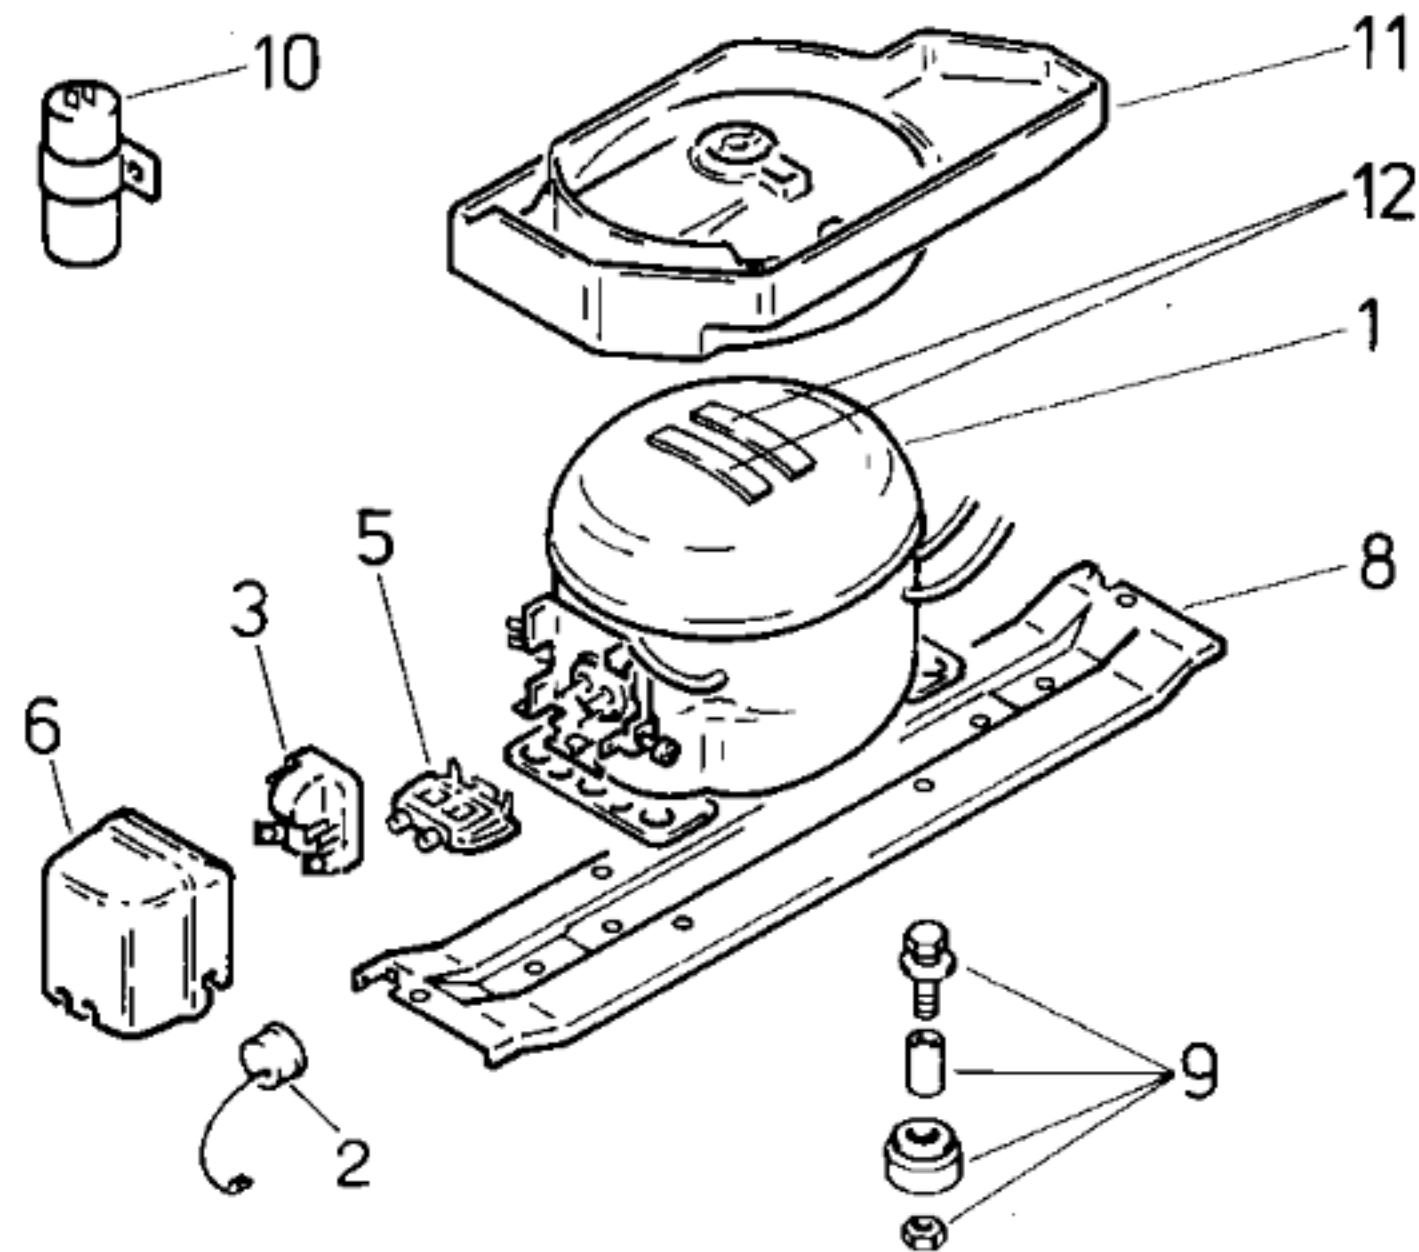

| Pos. | GB1                 | GB1               |  |
|------|---------------------|-------------------|--|
|      | Aspera<br>BP 1084 A | Danfoss<br>TL 4 A |  |
| 1    | 14 0345             | 13 1064           |  |
| 2    | 02 7426             |                   |  |
| 3    | 02 7424             | 02 0108           |  |
| 4    |                     |                   |  |
| 5    | 02 7425             | 02 7310           |  |
| 6    | 05 5145             | 05 1413           |  |
| 7    |                     |                   |  |
| 8    |                     |                   |  |
| 9    | 05 0166             | 05 0166           |  |
| 10   |                     |                   |  |
| 11   |                     |                   |  |
| 12   |                     |                   |  |

| TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES  |  |                        |           |        |
|---------------------------------------------------------|--|------------------------|-----------|--------|
| Verdichter/Compressor/Compresseur                       |  | Aspera                 | Danfoss   |        |
| Typ/Type                                                |  | BP 1084 A              | TL 4 A    |        |
| Förderleistung/Delivery/Débit                           |  | l/h                    | 774       | 702    |
| Anlaufstrom/Starting current/Cour. de démarrage         |  | A                      | 4,15      | 7,8    |
| Widerstand/Resistance/Résistance                        |  | Ha/main/prin. $\Omega$ | 24,4      | 23,8   |
|                                                         |  | Hi/aux $\Omega$        | 27,8      | 19,7   |
| Temp. Regler/Thermostat                                 |  | WHF                    |           |        |
| Typ/Type                                                |  | TF 57 SF1              |           |        |
| Reglerstellung/Position                                 |  | kalt - 25              | warm - 18 |        |
| Schaltwerte/Switching values/<br>Valeurs de commutation |  | „ein“                  | „aus“     |        |
|                                                         |  | („abtauen“ od.)        | „alarm“   |        |
|                                                         |  | $^{\circ}\text{C}$     | - 34,5    | - 26,5 |
|                                                         |  |                        | - 14      |        |
| Füllmenge/Fill.quantity/Charge                          |  | R12                    | g         | 110    |
| Anschlußwert/Conn.load/Puiss. connectée                 |  | W                      |           | 90     |
| Heizung/Heater/Chauffage                                |  |                        |           |        |
| Widerstand/Resistance/Résistance                        |  | $\Omega$               |           |        |
| Leistung/Power/Puissance                                |  | W                      |           |        |
| Ventilator/Blower/Ventilateur                           |  |                        |           |        |
| Widerstand/Resistance/Résistance                        |  | $\Omega$               | 270       |        |
| Magnetventil/Magnetic valve/Electrovanne                |  |                        |           |        |
| Widerstand/Resistance/Résistance                        |  | $\Omega$               |           |        |
| Spannung/Voltage/Tension                                |  | V                      |           |        |