




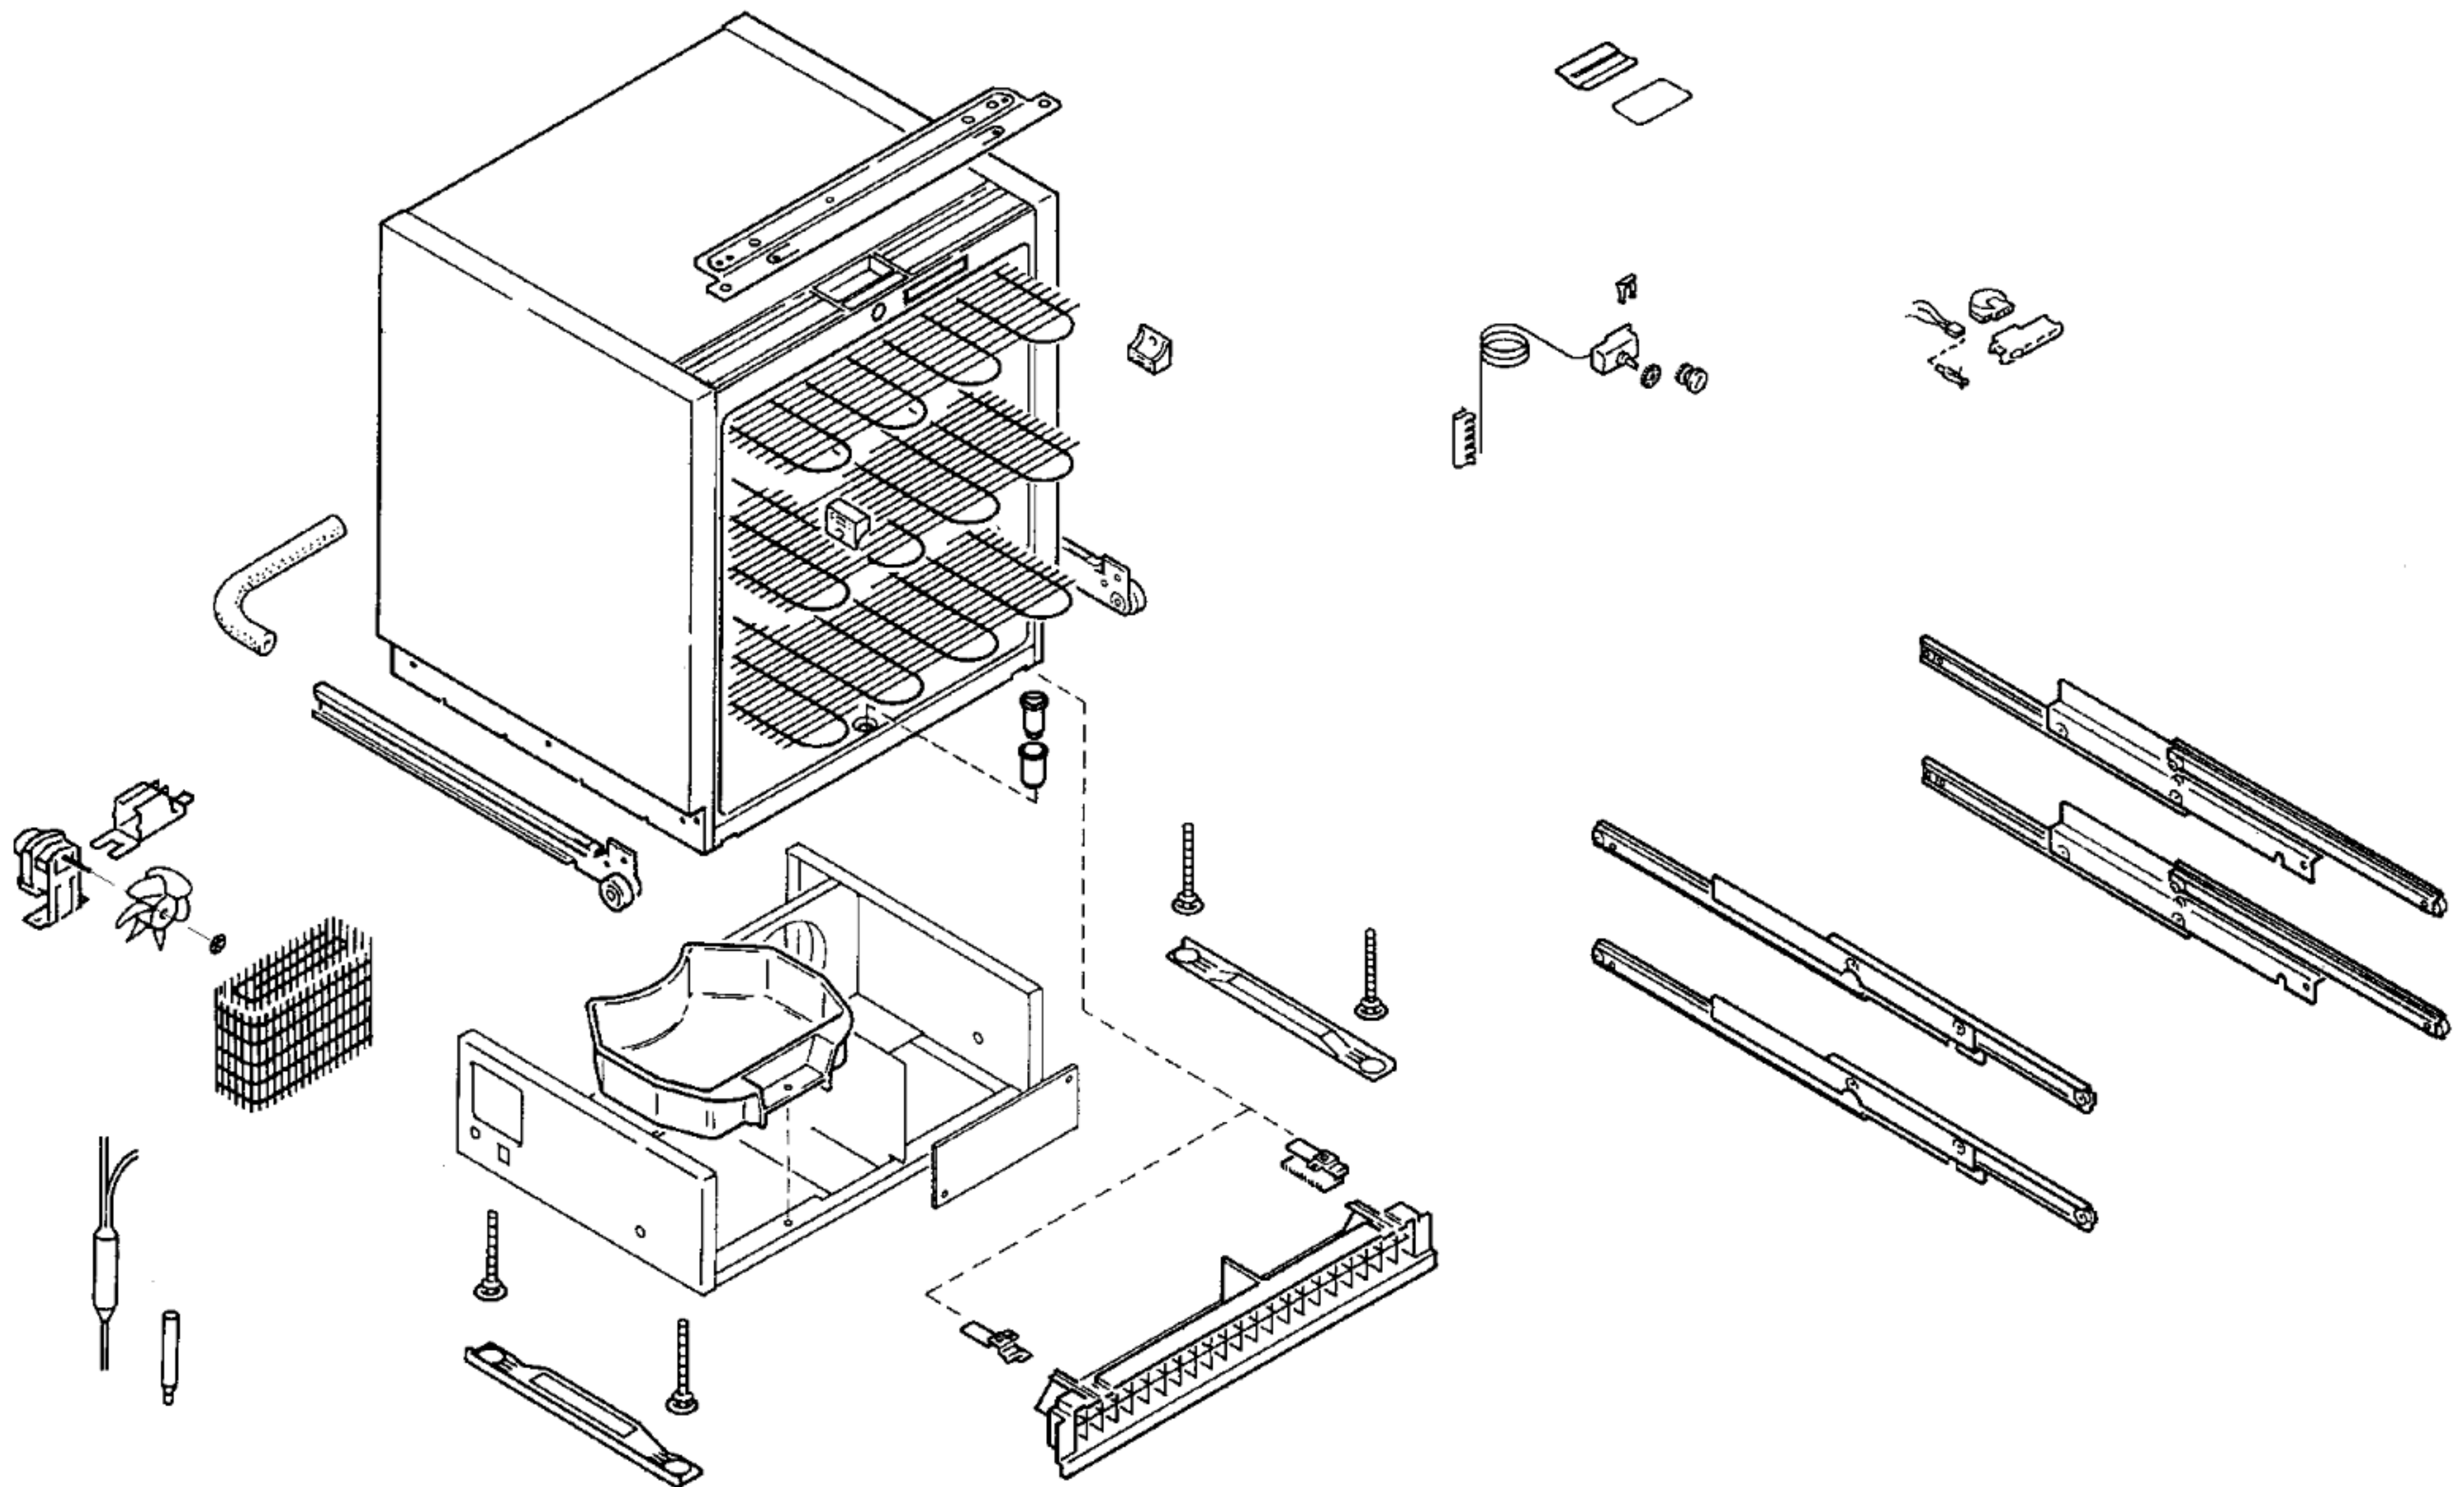

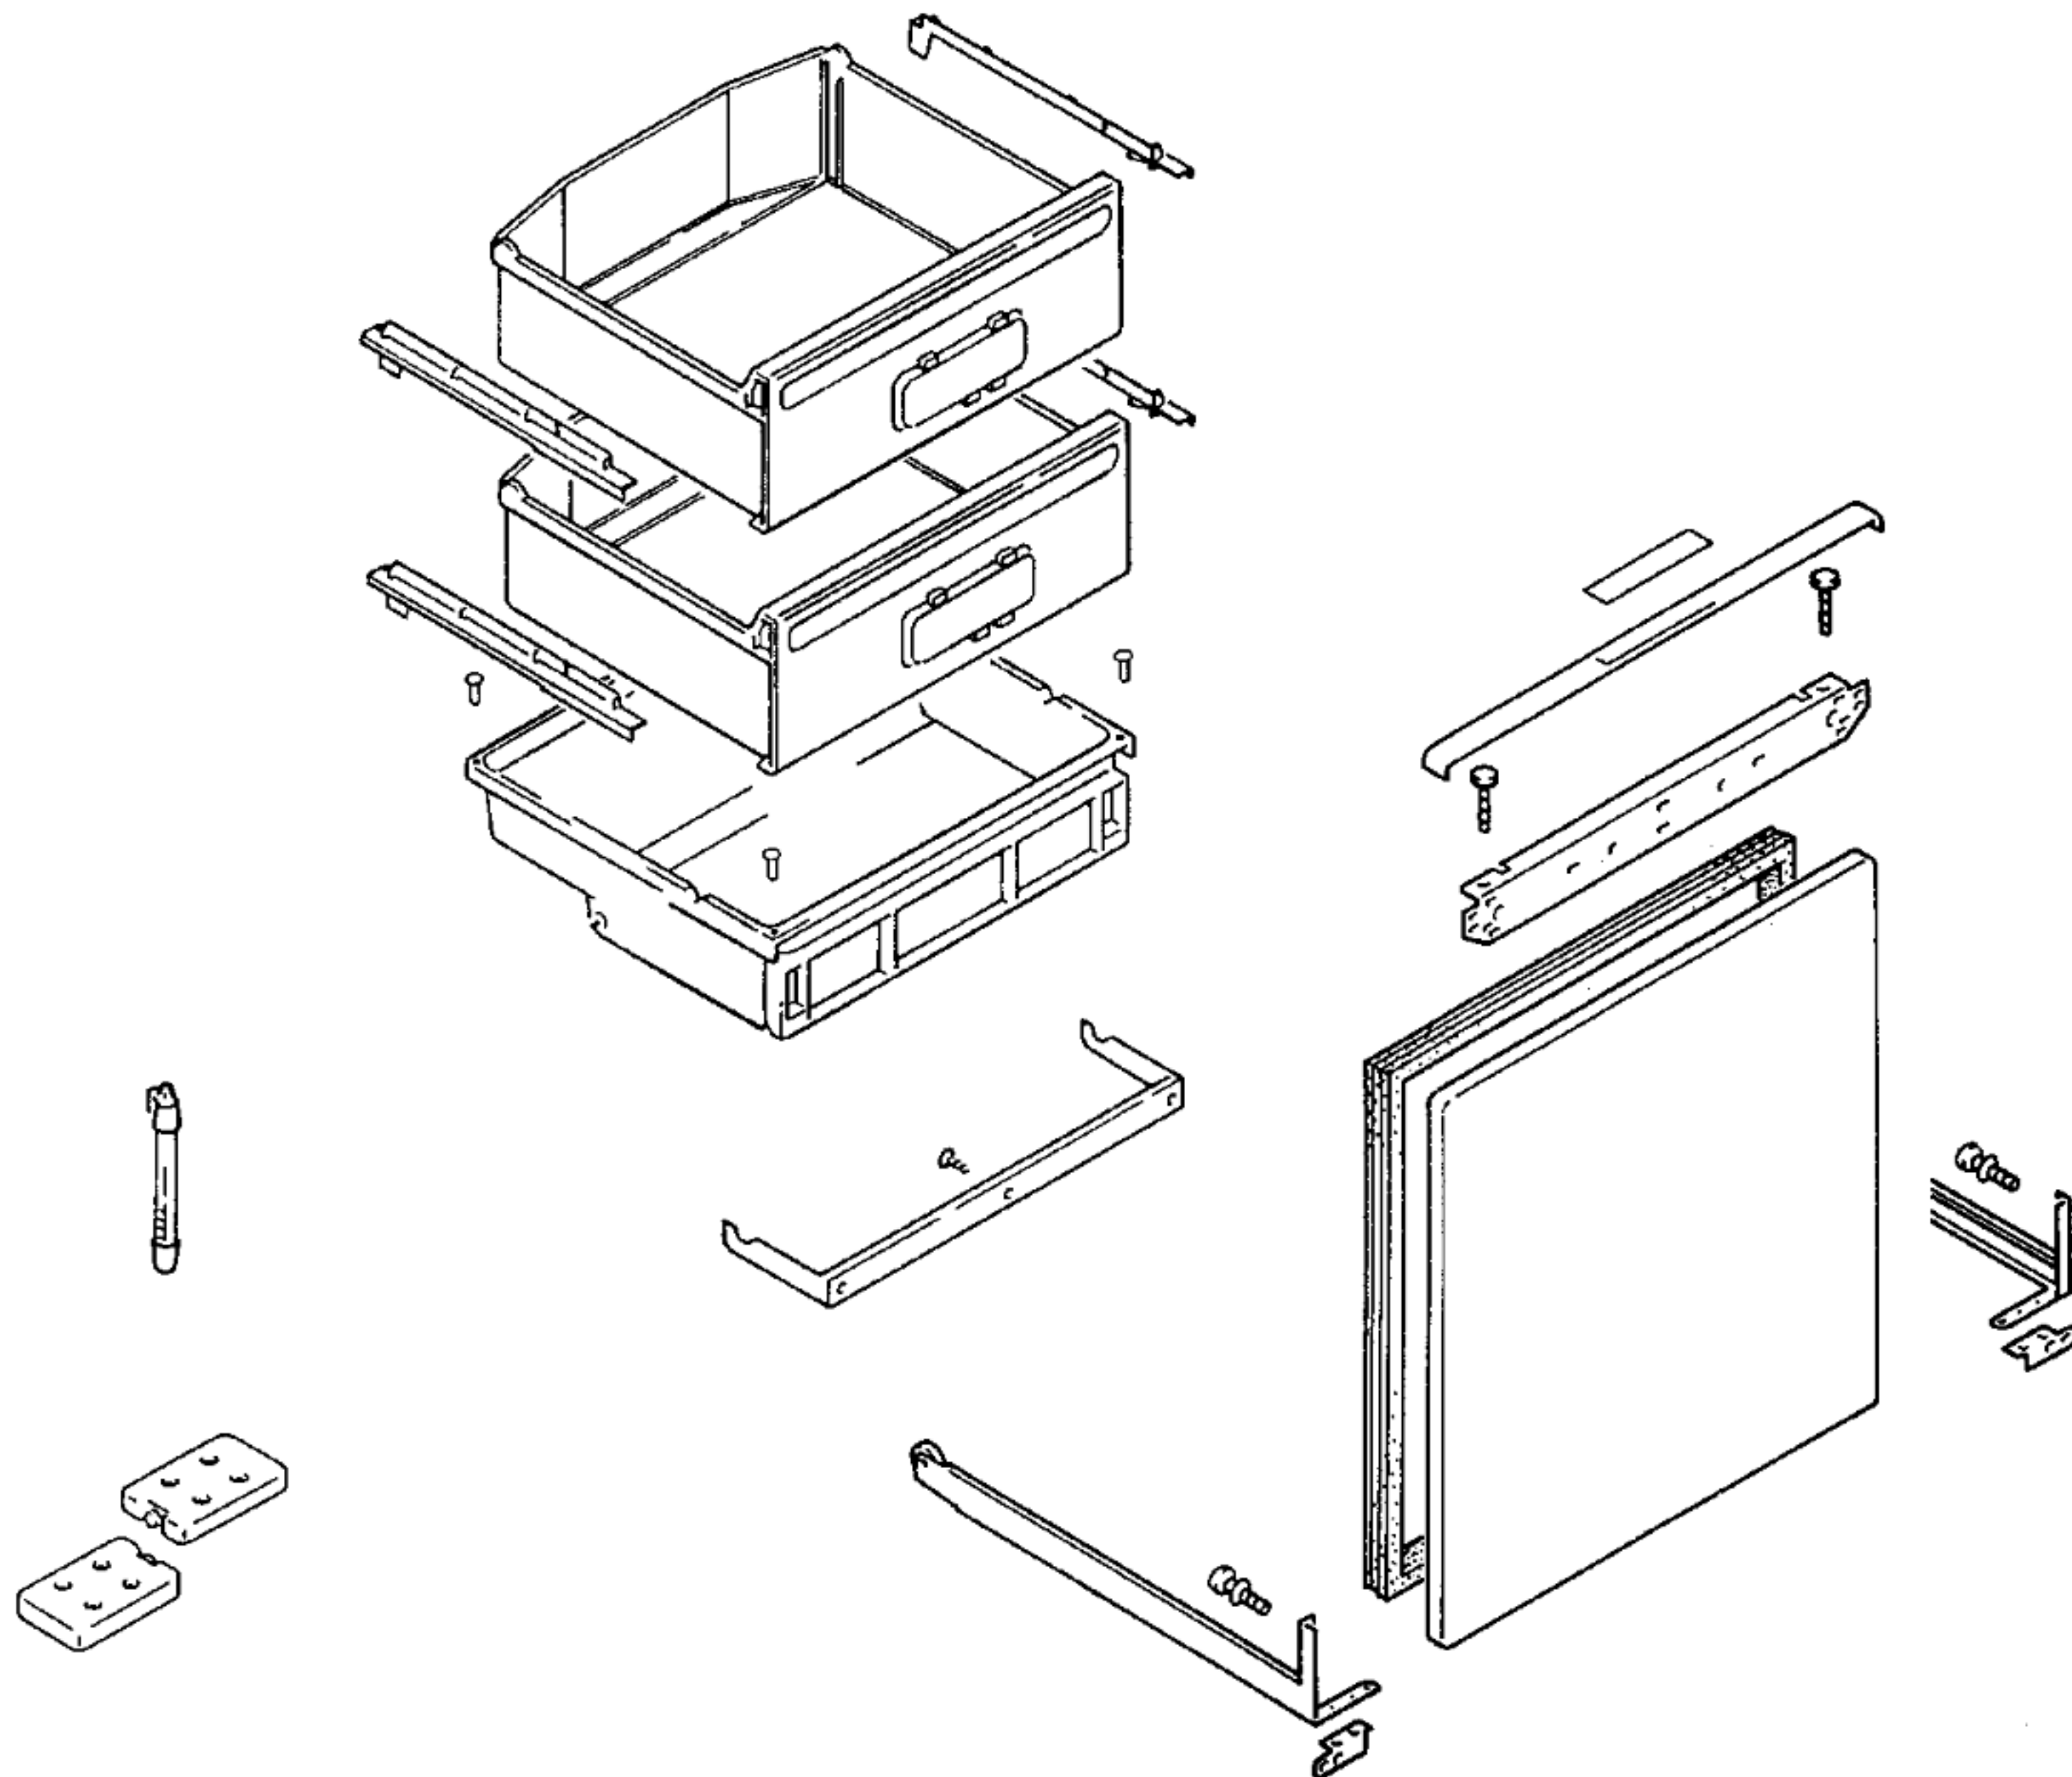

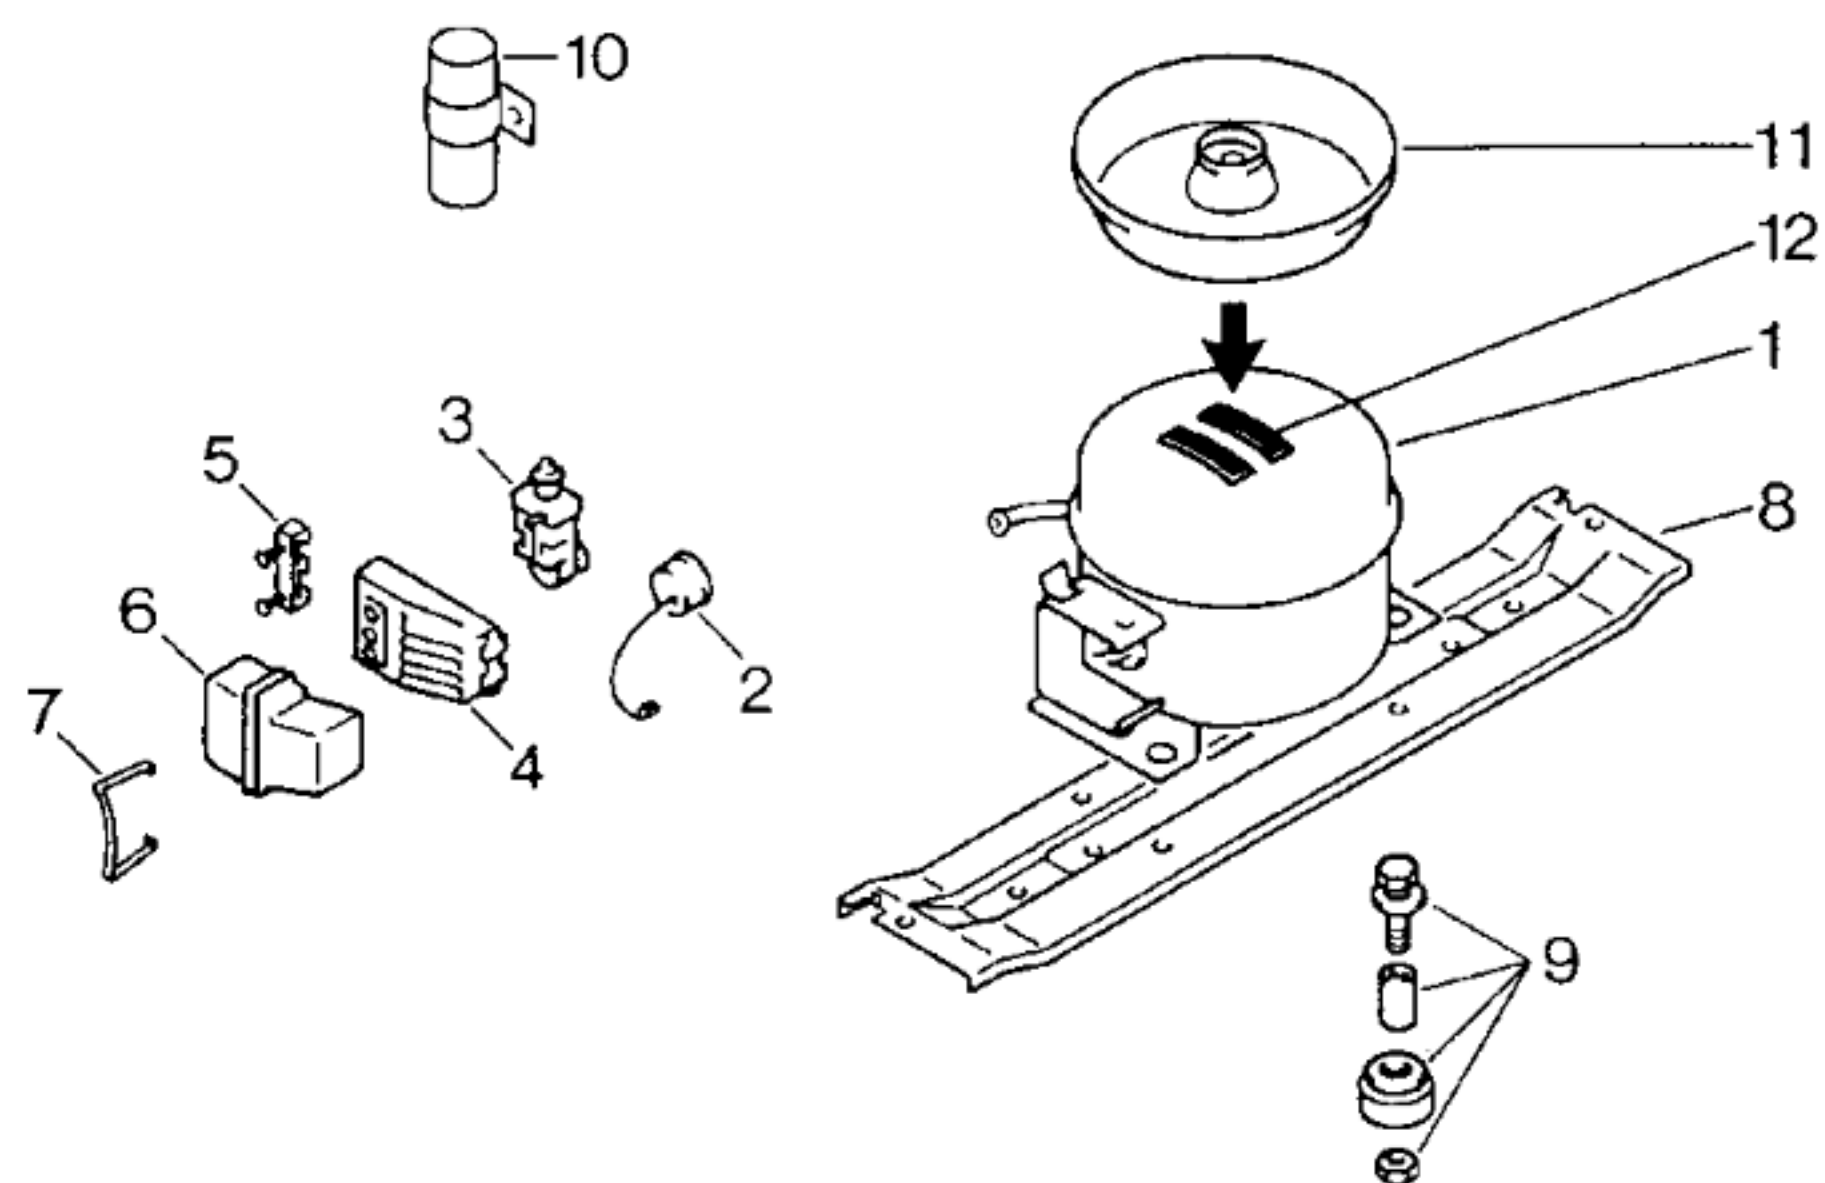

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES

Verdichter/Compressor/Compresseur		Aspera	Danfoss	
Typ/Type		BP 1111 A	TL5A	
Förderleistung/Delivery/Débit	l/h	1031	914	
Anlaufstrom/Starting current/Cour. de démarrage	A	8,4	9,0	
Widerstand/Resistance/Résistance	Ha/main/prin. Ω	18,3	15,5	
	Hi/aux Ω	37,9	16,8	
Temp.-Regler/Thermostat		WHF		
Typ/Type		TF 57 SF 2		
Reglerstellung/Position		kalt warm		
Schaltwerte/Switching values/	„ein“ $^{\circ}\text{C}$	-25 -17		
Valeurs de commutation	„aus“	-33 -23		
	(„abtauen“ od.) „alarm“	-19,5 -13		
Füllmenge/Fill.quantity/Charge	R12 g	170		
Anschlußwert/Conn.load/Puiss. connectée	W	120		
Heizung/Heater/Chauffage				
Widerstand/Resistance/Résistance	Ω			
Leistung/Power/Puissance	W			
Ventilator/Blower/Ventilateur				
Widerstand/Resistance/Résistance	Ω			
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance	Ω			
Spannung/Voltage/Tension	V			

Pos.			
1			
2			
3			
4			
5			
6			
7			
8			
9			
10			
11			
12			