


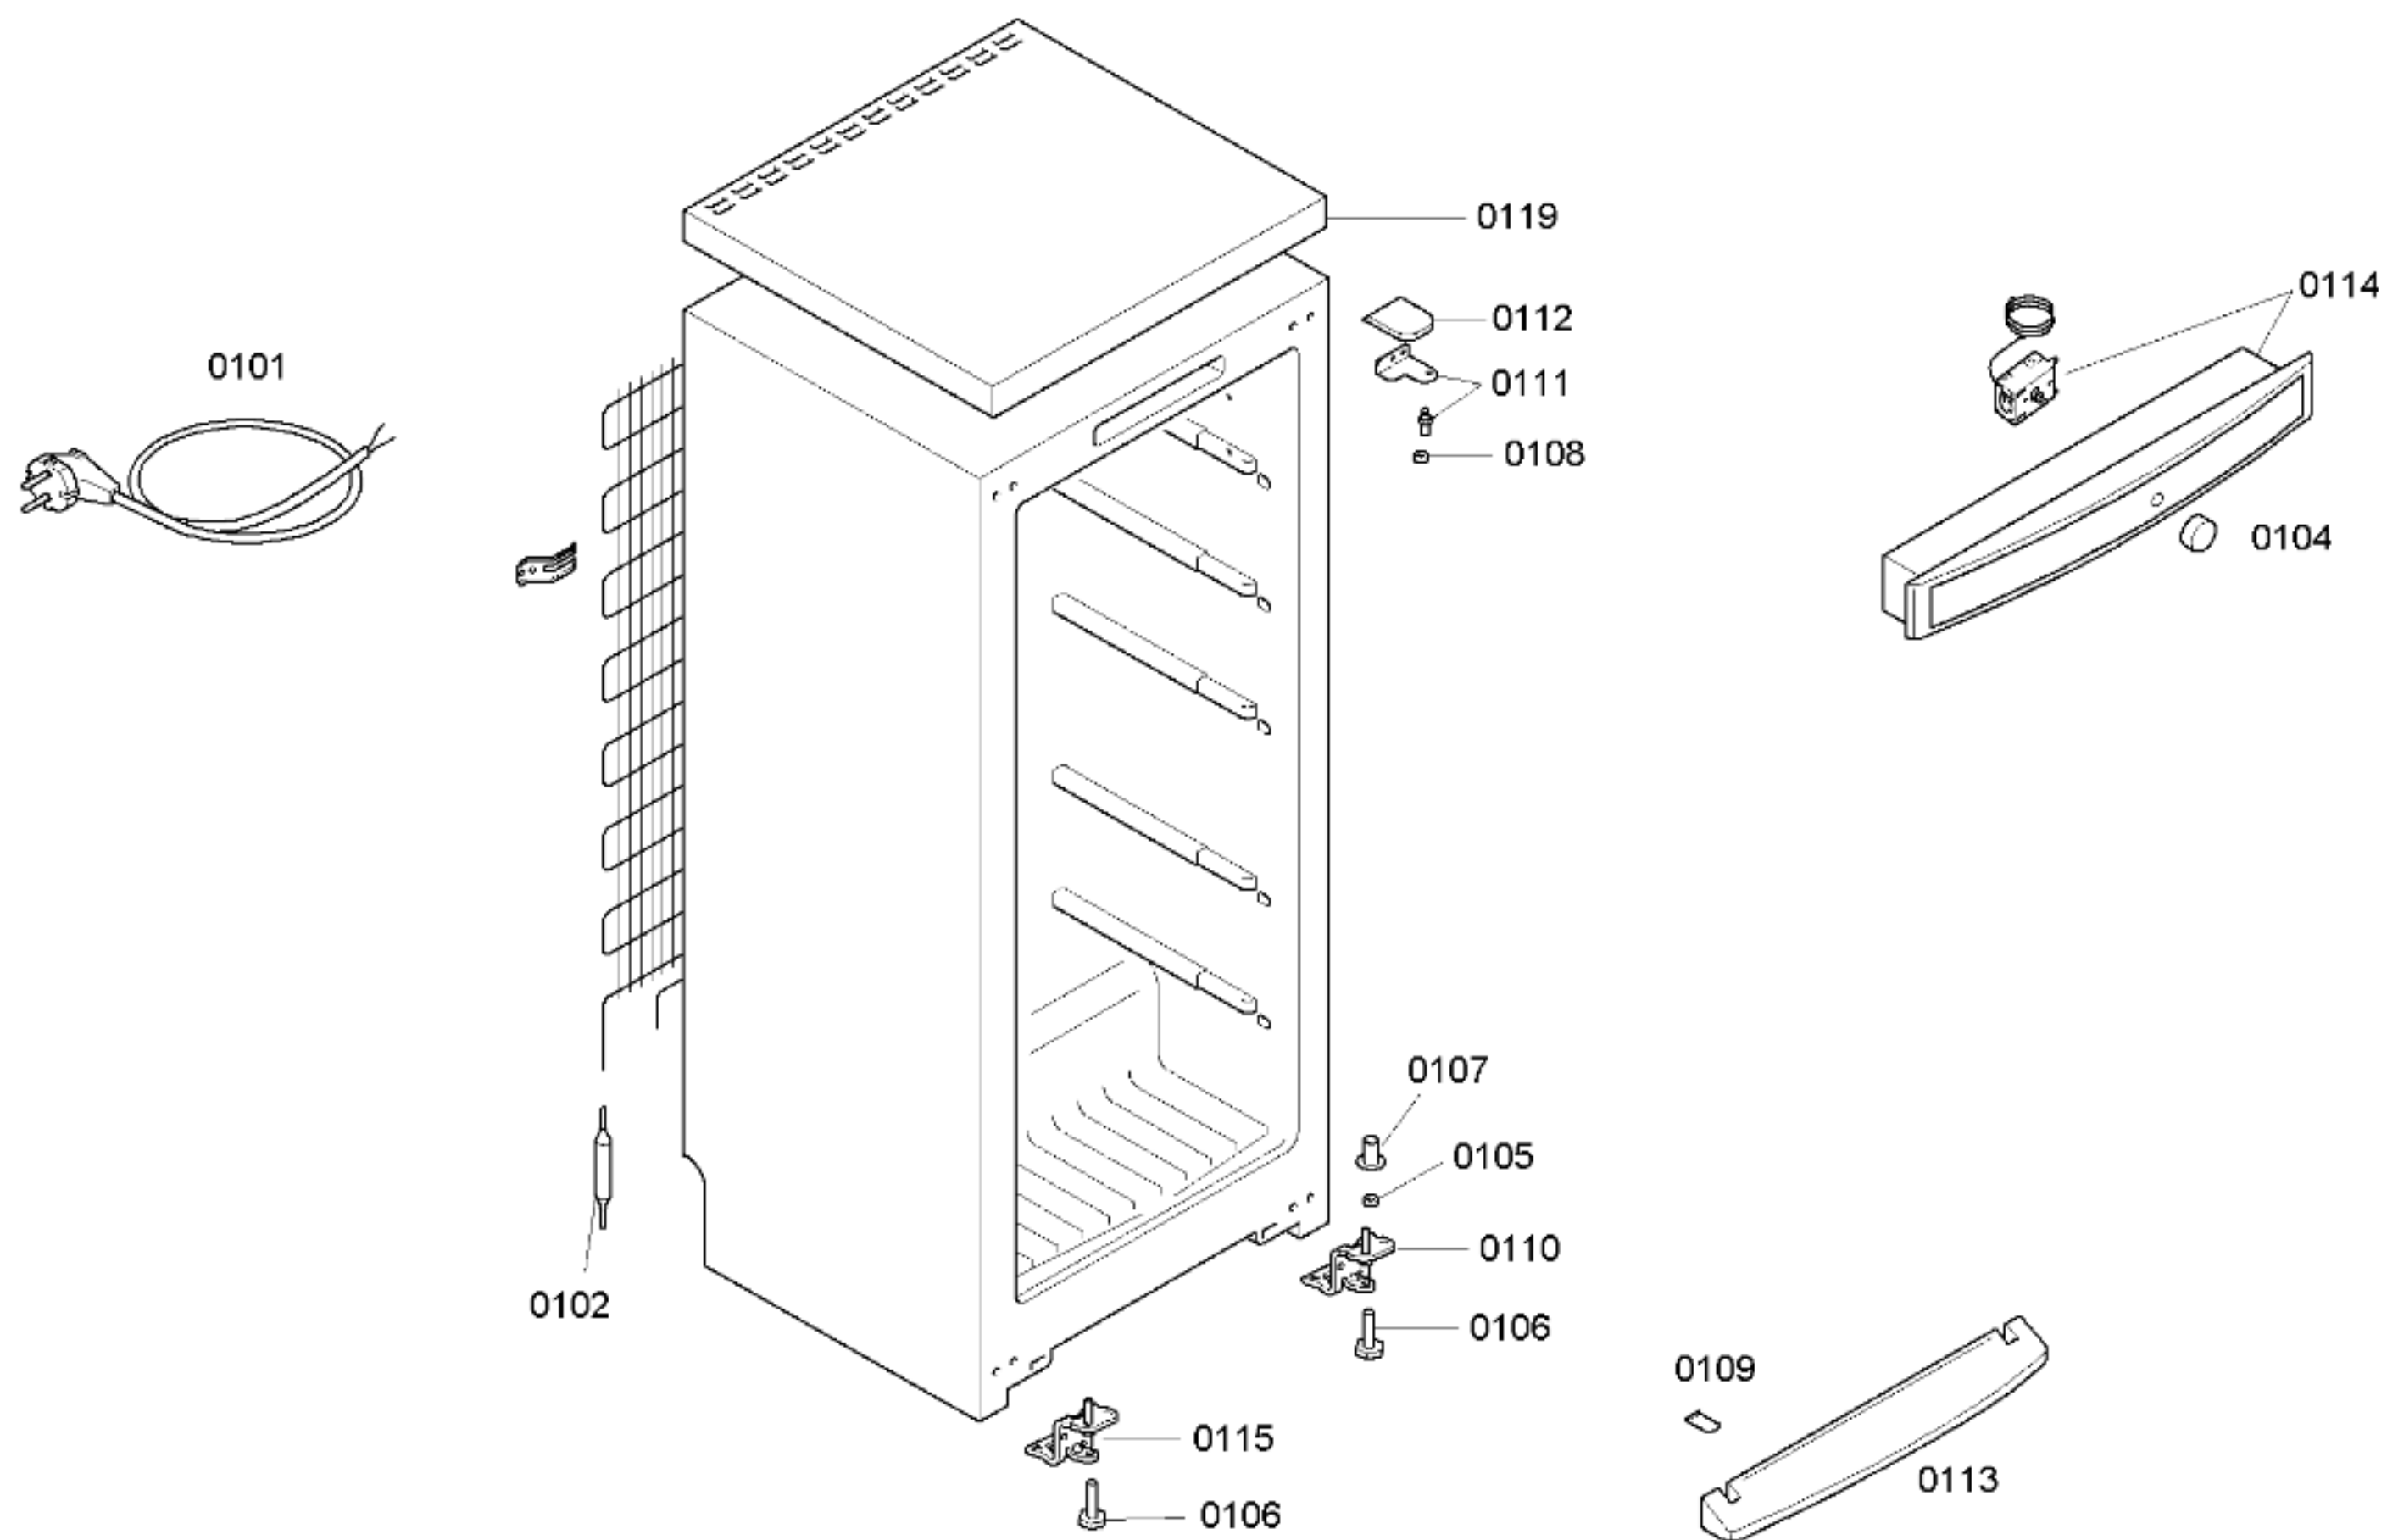


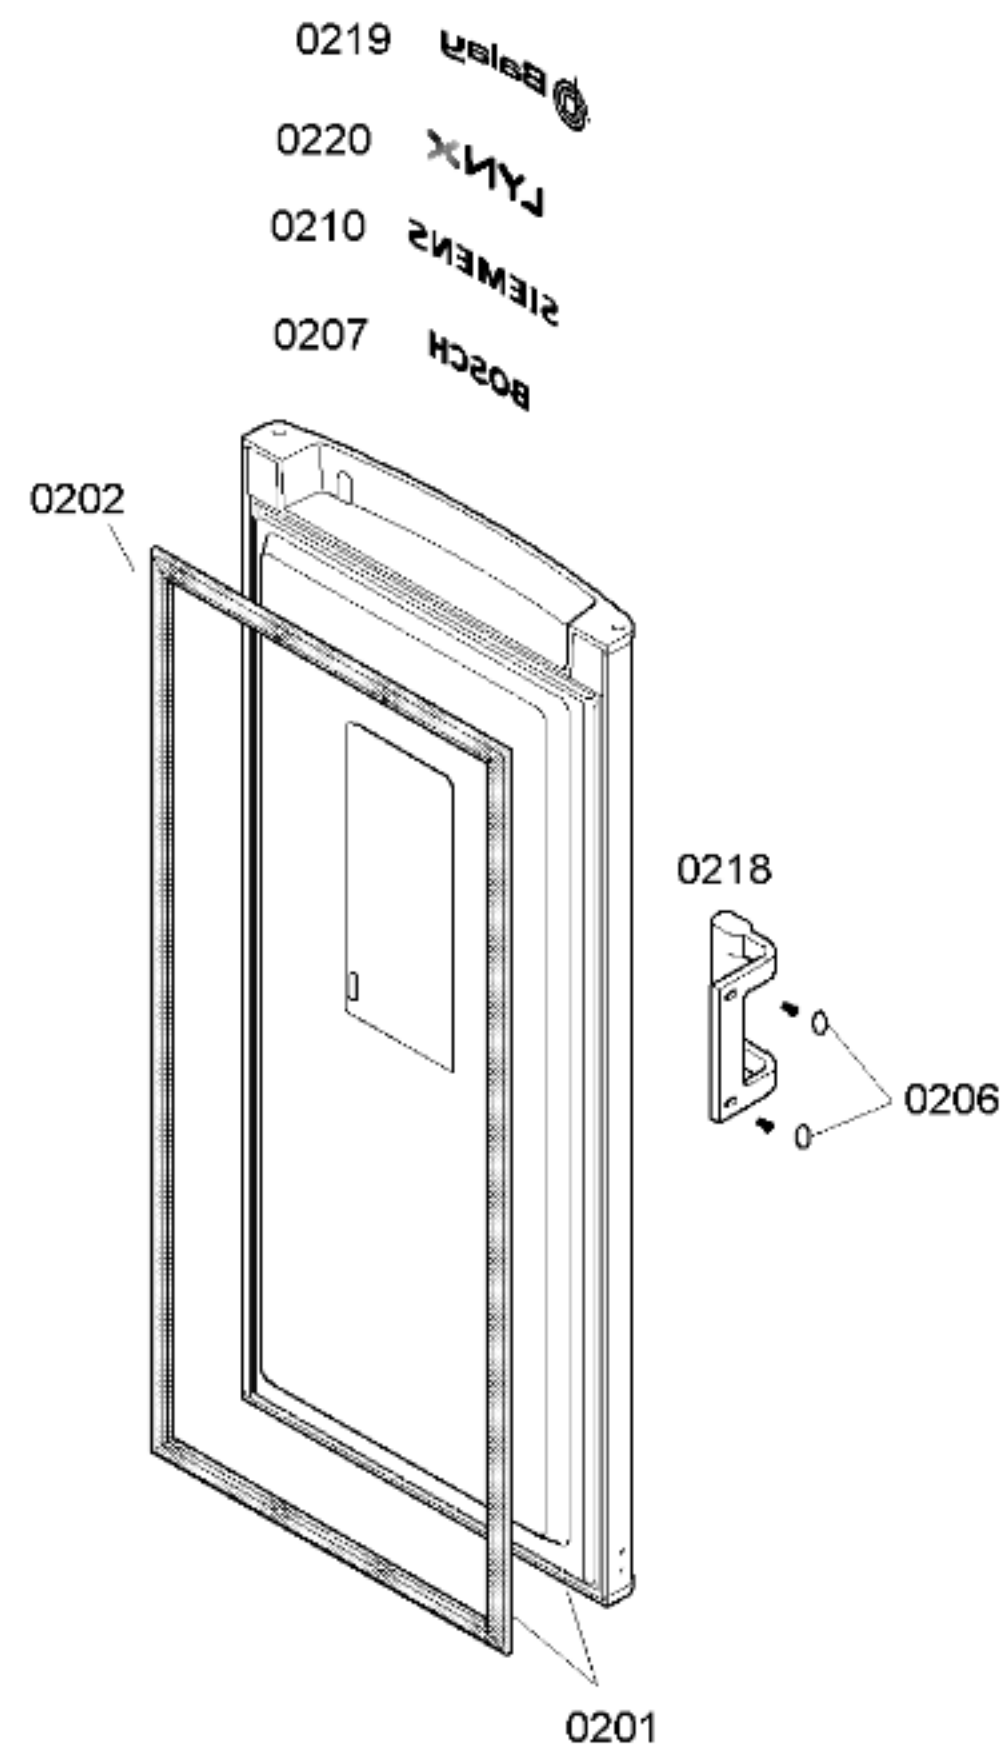

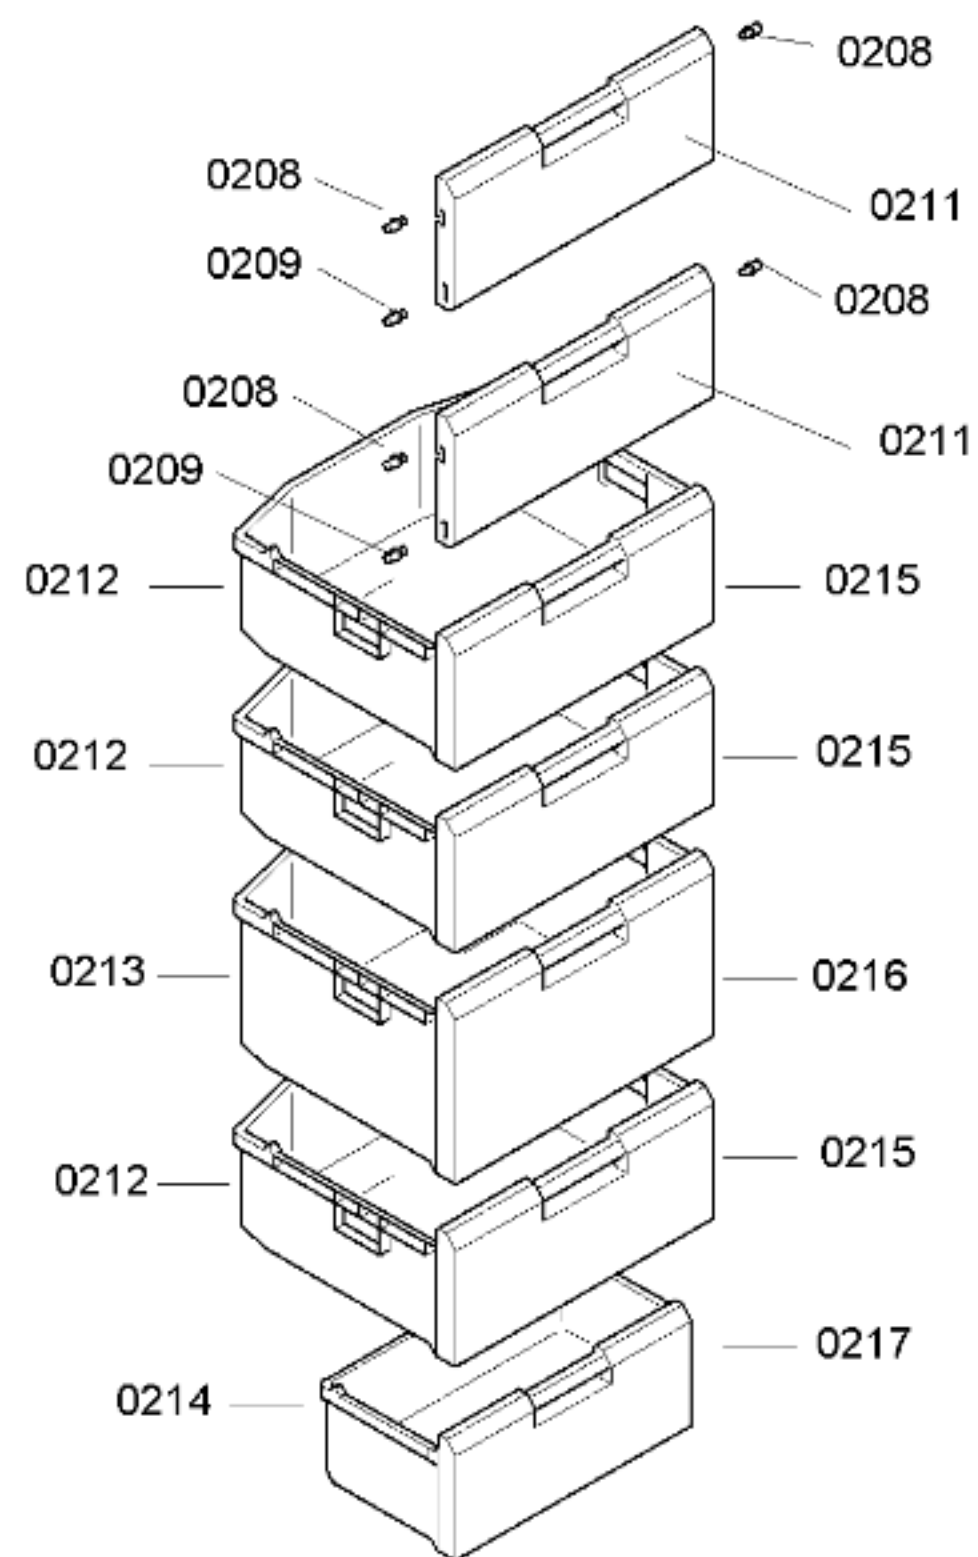

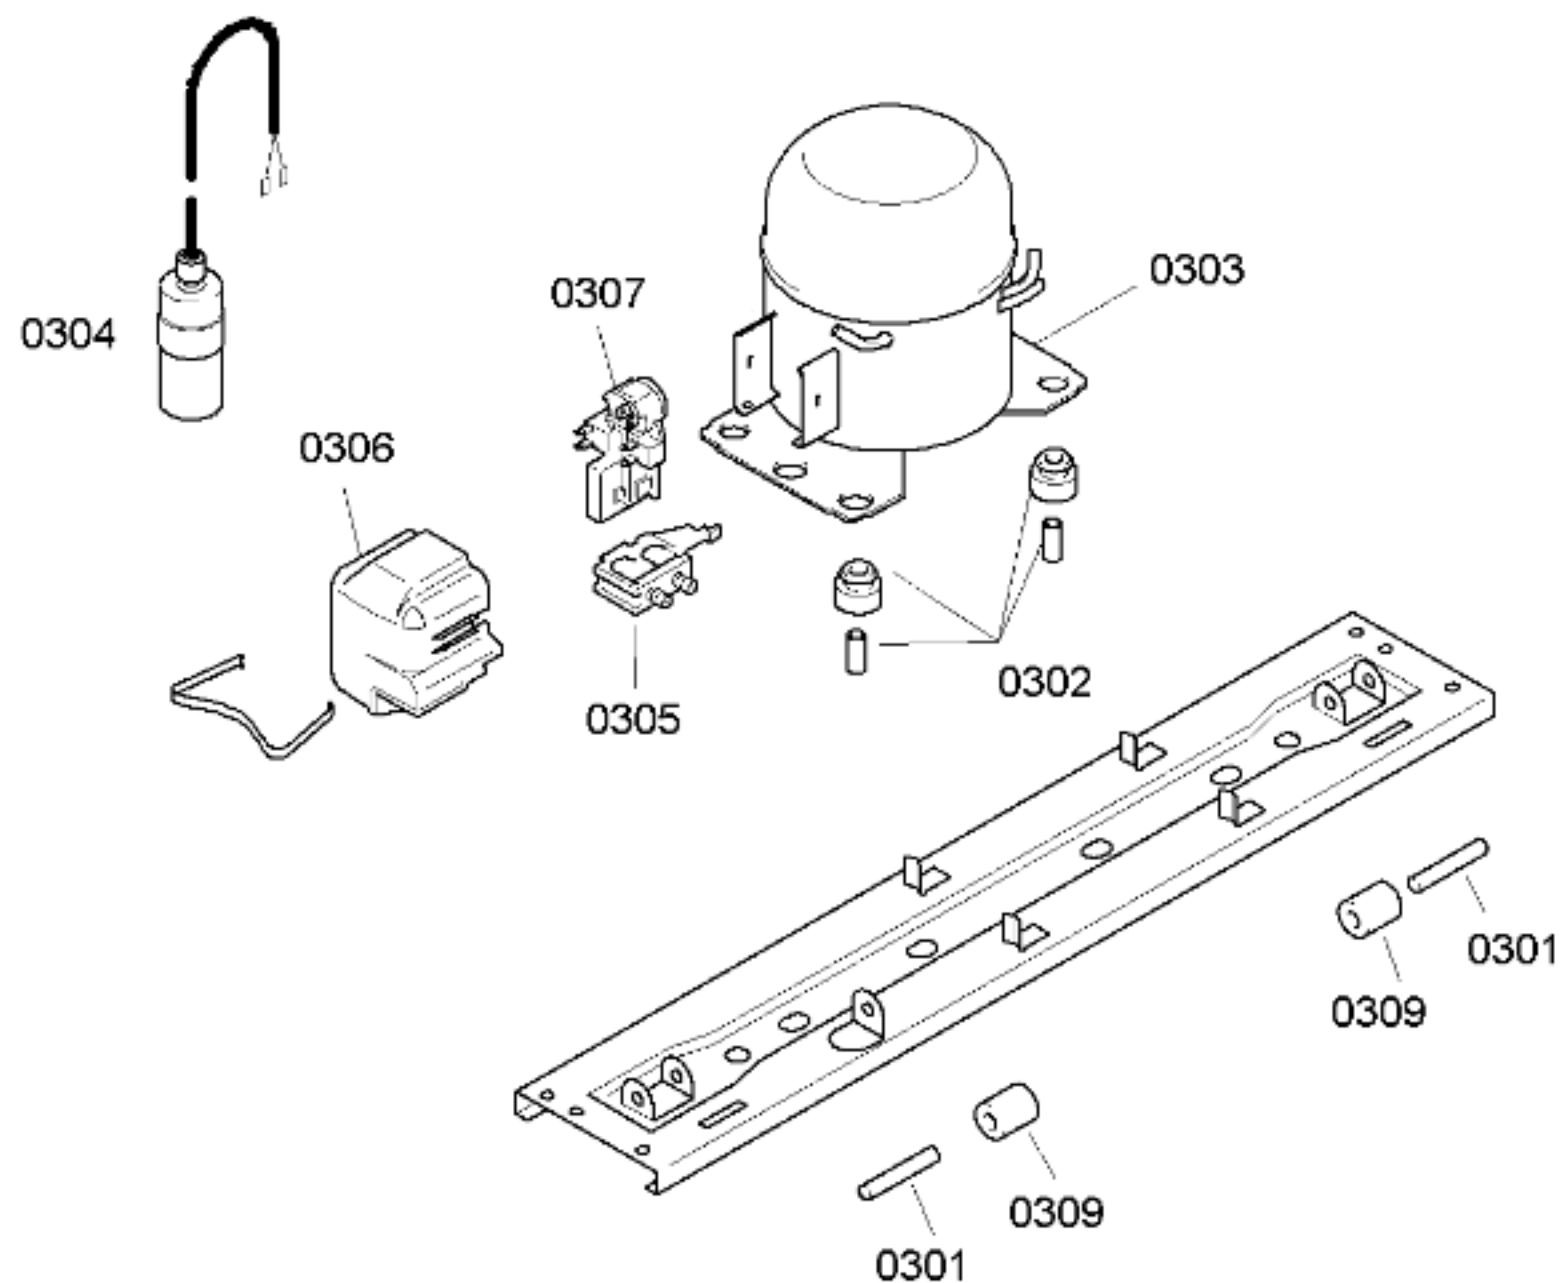

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES				
Verdichter/Compressor/Compresseur		Matsushita		
Typ/Type		DC 110 E		
Förderleistung/Delivery/Débit		l/h	0354	
Anlaufstrom/Starting current/Cour de démarrage		A	8,2	
Widerstand/Resistance/Résistance		Ω	12	
		Hi/aux	Ω	30,9
Temp.-Regler/Thermostat				
Typ/Type				
Regelstellung/Position				
Schaltwerte/Switching values		"warm"		
Valeurs de commutation		"kalt"		
		"alarm"		
Füllmenge/Fill.quantity/Charge		R600a	*	
Anschlußwert/Conn.load/Puiss. connectée		W	116	
Heizung/Heater/Chauffage				
Widerstand /Resistance/Résistance		Ω		
Leistung/Power/Puissance		W		
Ventilator/Blower/Ventilateur				
Widerstand /Resistance/Résistance		Ω		
NTC-Fühler / Sensor		°C	k Ω	°C k Ω
		+10	9,95 $\pm$ 0,18	-18 43,31 $\pm$ 1,10
		+5	12,70 $\pm$ 0,18	-22 54,66 $\pm$ 1,59
		0	16,33 $\pm$ 0,16	-26 69,42 $\pm$ 2,29
Magnetventil/Magnetic valve/Electrovanne				
Widerstand/Resistance/Résistance		Ω		
Spannung/Voltage/Tension		V		