



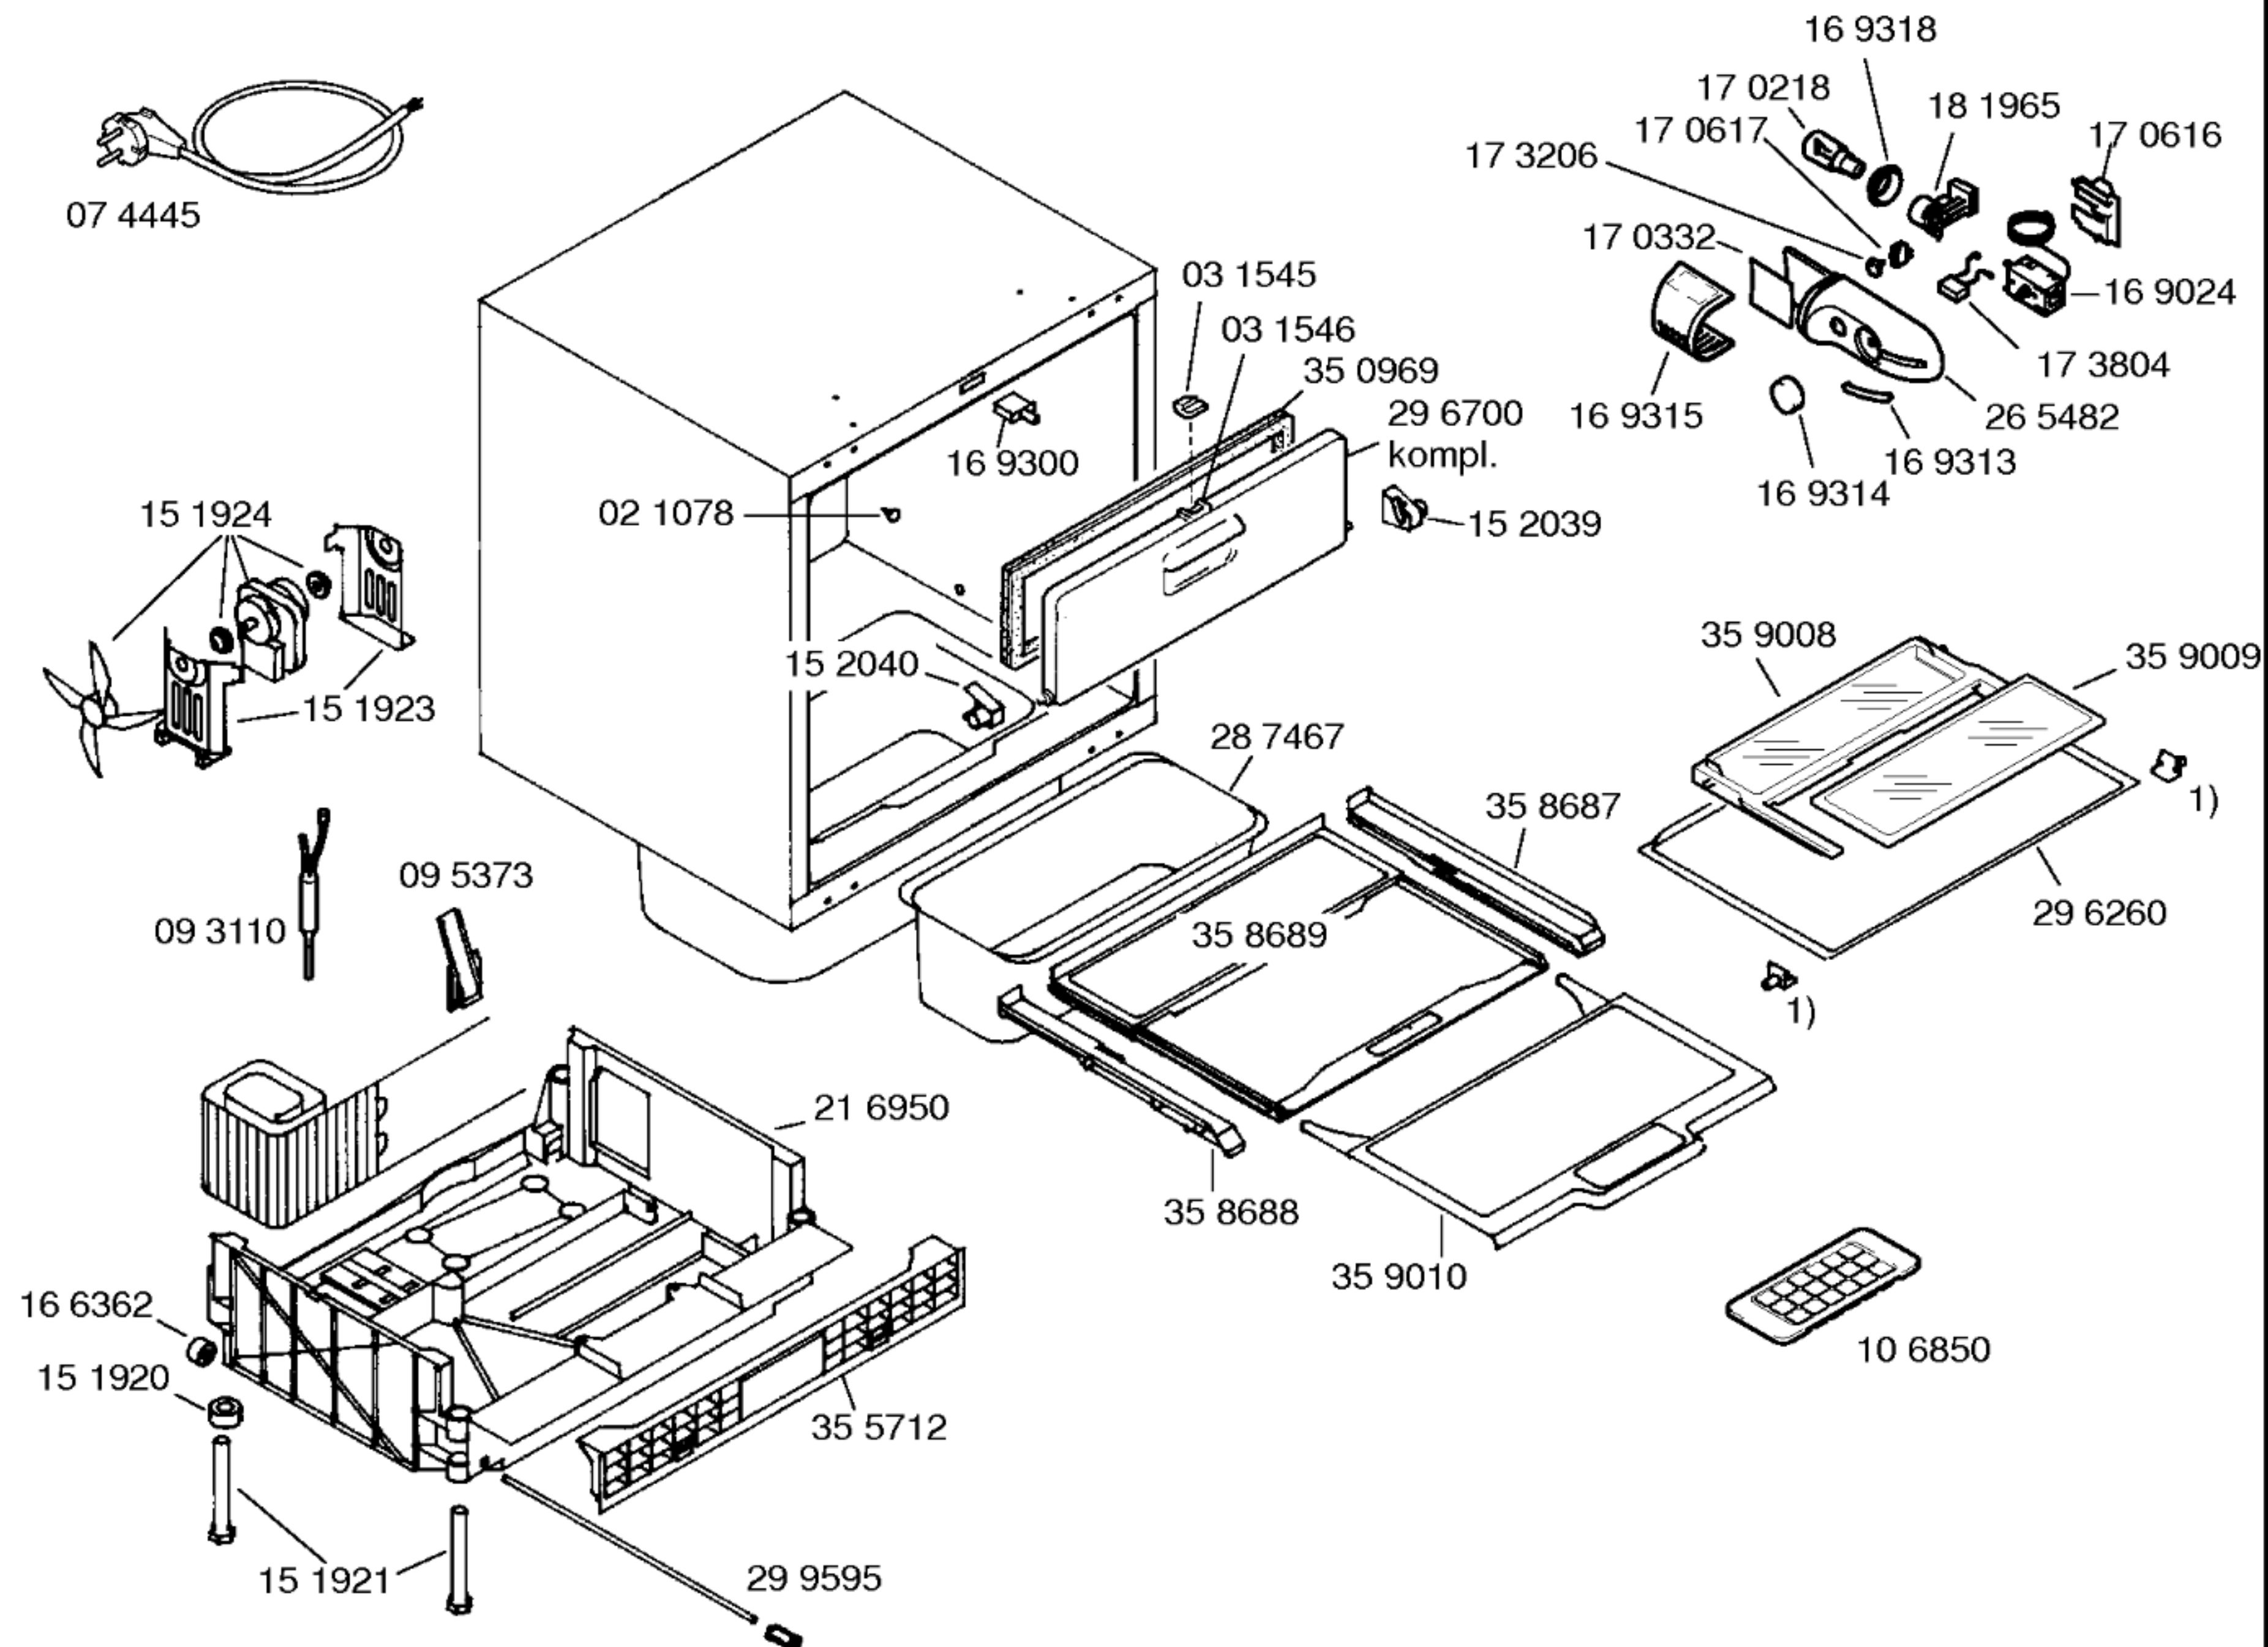

Gebrauchsanweisung
52 6326
Montageanleitung
52 6094
Beistellsatz
26 7188


1) 16 5789

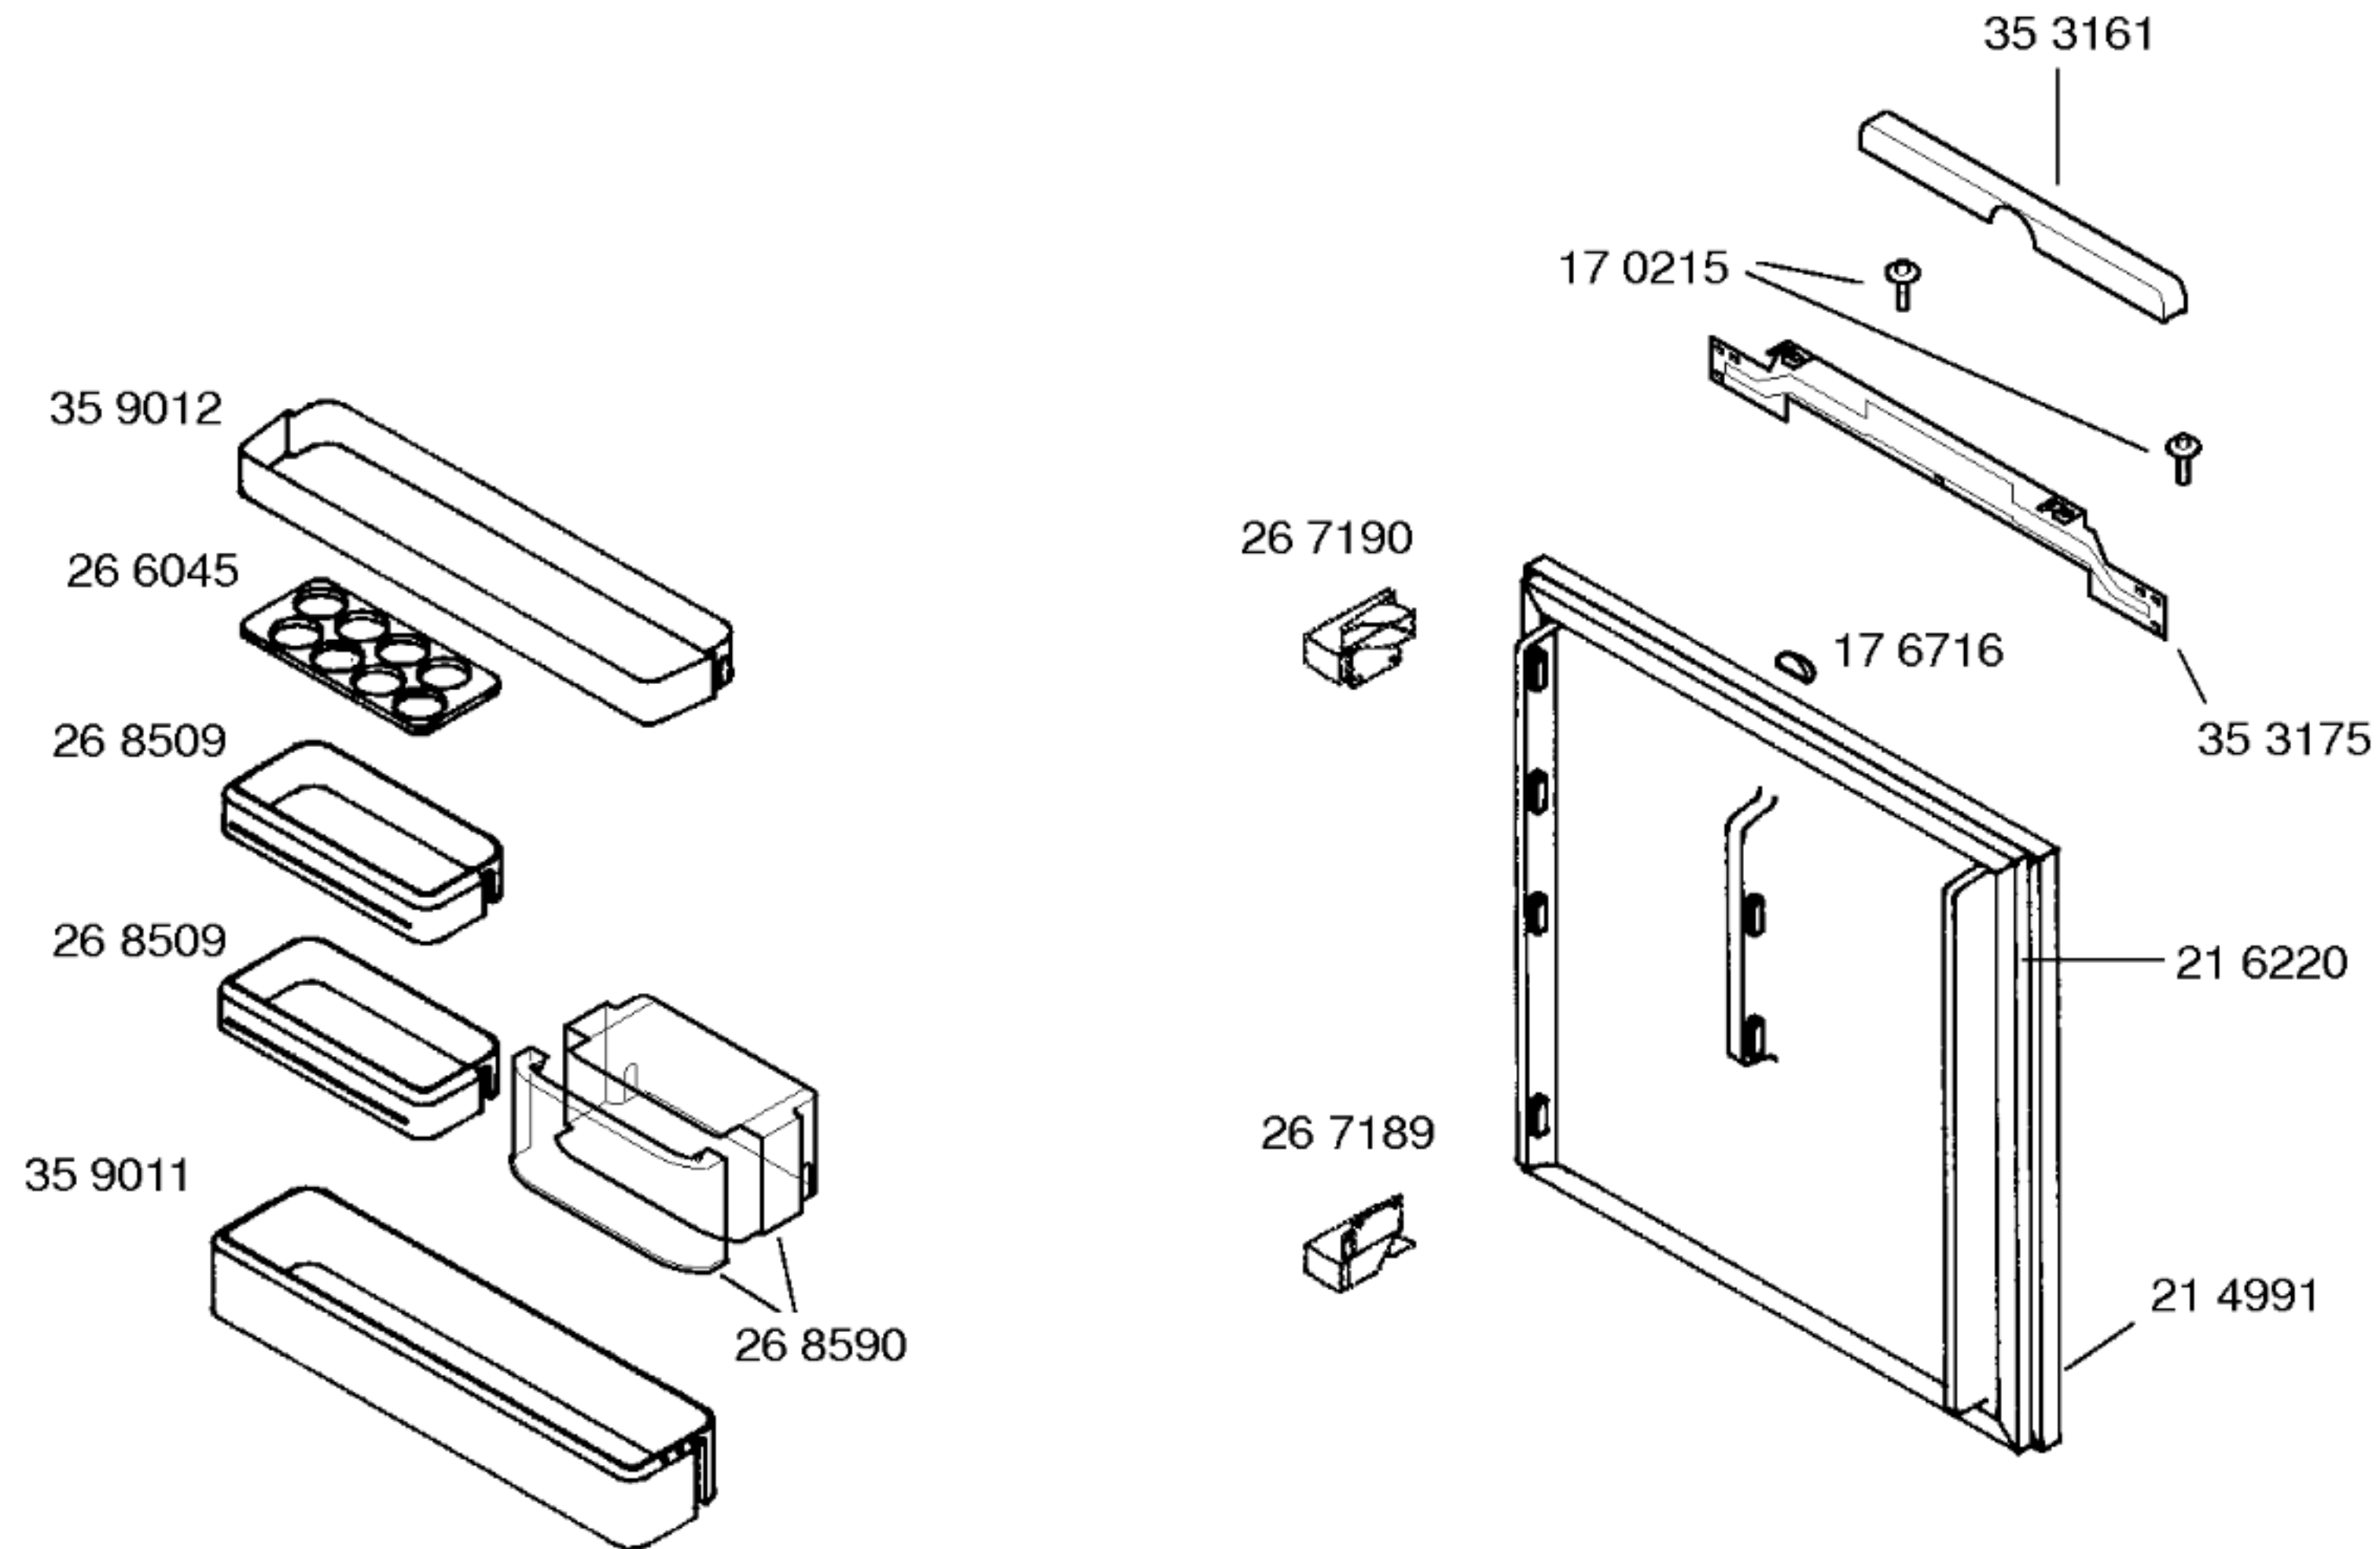

Mat. – Nr. – Konstante
3740

TECHNISCHE DATEN / TECHNICAL DATA / DONNEES TECHNIQUES			
Verdichter/Compressor/Compresseur		Danfoss	Goldstar
Typ/Type		TLES 7 KK2	ND69NAEM
Förderleistung/Delivery/Débit		l/h	1242
Anlaufstrom/Starting current/Cour de démarrage		A	7,5
Widerstand/Resistance/Résistance		Ha/main/prin. Ω	18,9
		Hi/aux Ω	15,3
Temp.-Regler/Thermostat		Ranco	
Typ/Type		K 59	
Reglerstellung/Position		kalt warm	
Schaltwerte/Switching values/		„ein“ °C	
Valeurs de commutation		+5 +5	
		–28 –17	
(„abtauen“ od.)		„alarm“	
Füllmenge/Fill.quantity/Charge	R600a	g	*
Anschlußwert/Conn.load/Puiss. connectée	W	75	
Heizung/Heater/Chauffage			
Widerstand/Resistance/Résistance		Ω	
Leistung/Power/Puissance		W	
Ventilator/Blower/Ventilateur		MES F61-10	
Widerstand/Resistance/Résistance		Ω	680
Schaltuhr/Timer/Minuterie de contact			
Widerstand/Resistance/Résistance		Ω	
Magnetventil/Magnetic valve/Electrovanne			
Widerstand/Resistance/Résistance		Ω	
Spannung/Voltage/Tension		V	

* siehe Typenschild

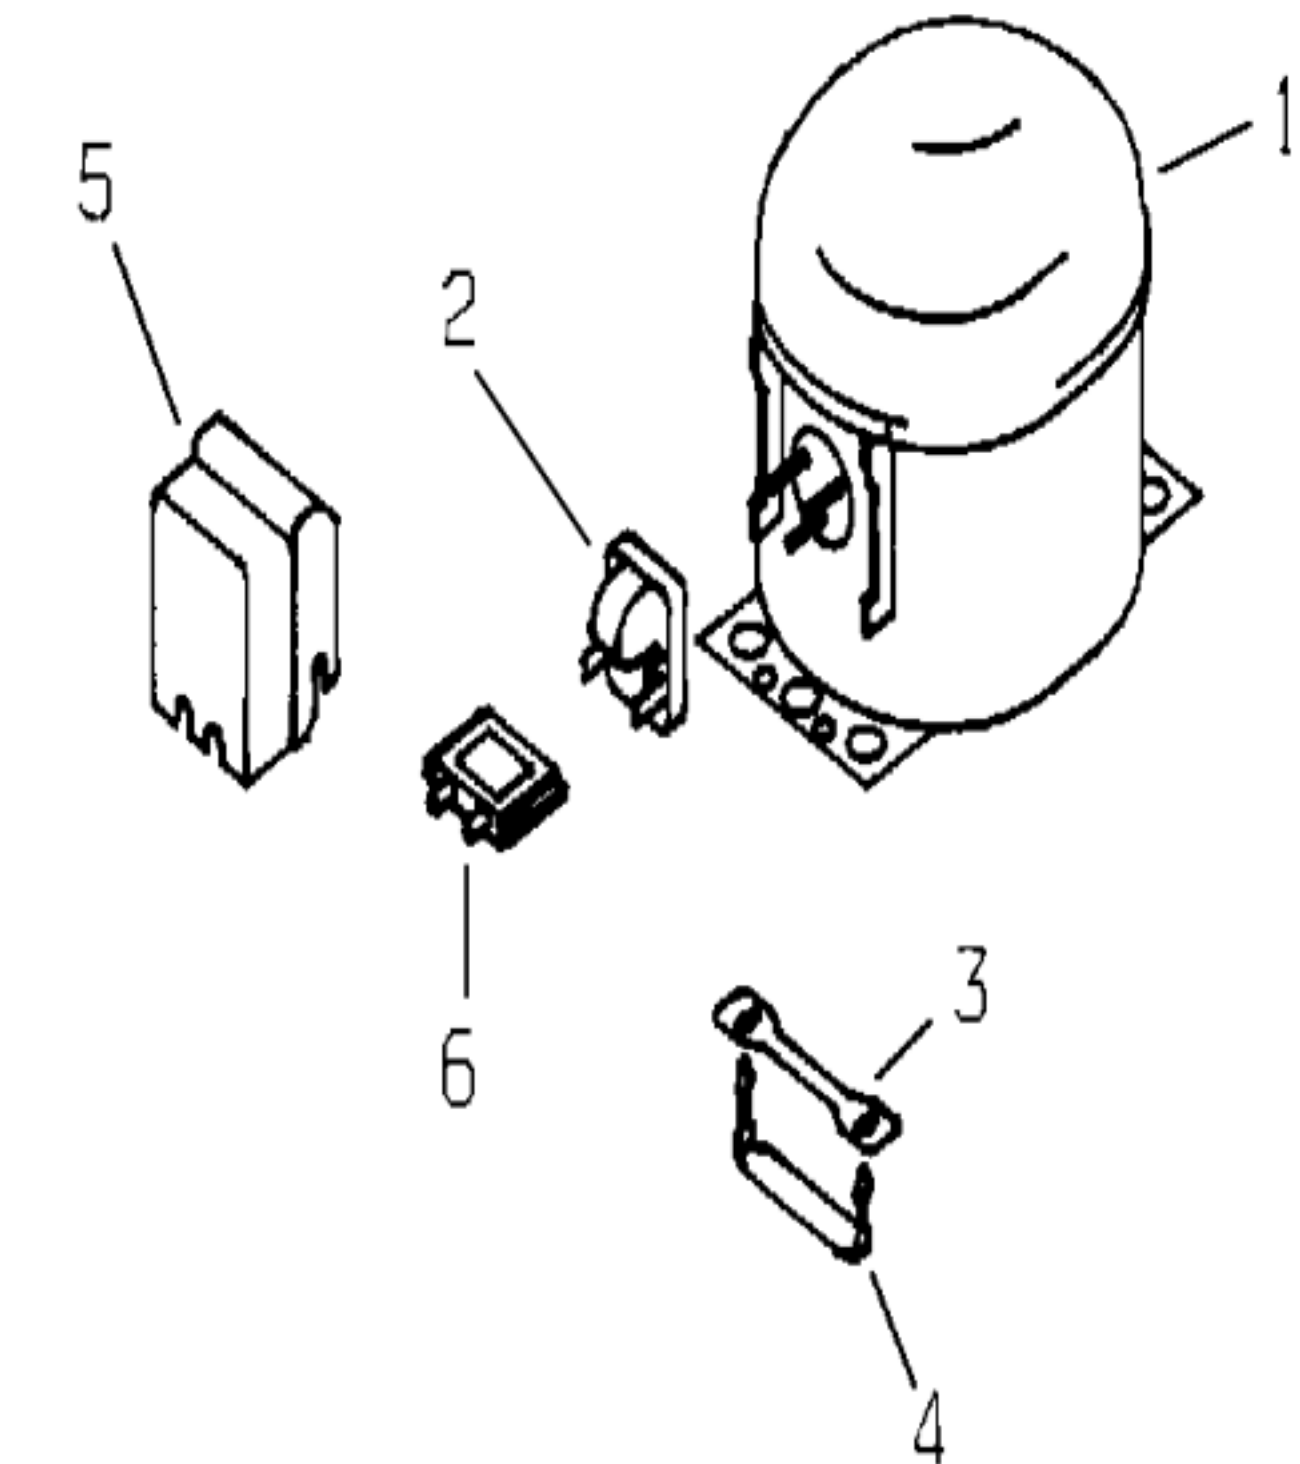

Pos.	V01,V02	V03,V04	
	Danfoss	Goldstar	
	TLES 7 KK2	ND69NAEM	
1	14 1903	14 1999	
2	15 1055	17 0743	
3	18 3656	18 3656	
4	18 3655	18 3655	
5	15 1072	17 0744	
6	15 0760	17 0745	
7			
8			
9			
10			
11			
12			